

# MODELS 606 & 608

## Current Transformers with Split Core

Window Sizes 2.75" x 2.70", 2.60"x 6.25"



### Application

For energy management systems and instrumentation.

### Frequency

50-400 Hz.

### Insulation Level

0.6 kV, BIL 10 kV full wave.

### Environment

Suitable for use in wet location environments

### Continuous Thermal Current Rating Factor

#### Model 606:

1.33 at 30°C. amb.,  
1.00 at 55°C. amb.

#### Models 608-501 thru 608-202:

1.33 at 30°C. amb.,  
1.00 at 55°C. amb.

#### Models 608-252 thru 608-322:

1.0 at 30°C. amb.,  
0.7 at 55°C. amb.

#### Secondary Cable:

Two No. 16 AWG 6 feet long,

#### Approximate Weight:

Model 606 ..... 4.5 lbs.  
Model 608 ..... 7.5 lbs.

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Transformers comply with IEC 61689

## Model 606

CATALOG NUMBER	CURRENT RATIO	BURDEN VA	ACCURACY AT 60 HZ
606-201	200:5	2.5	2 %
606-251	250:5	3	1 %
606-301	300:5	3.5	1 %
606-351	350:5	4	1 %
606-401	400:5	5	1 %
606-501	500:5	6	1 %
606-601	600:5	8	1 %
606-751	750:5	10	1 %
606-801	800:5	12	1 %
606-102	1,000:5	15	1 %
606-122	1,200:5	20	1 %

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Transformers comply with IEC 61689

## Model 608

CATALOG NUMBER	CURRENT RATIO	BURDEN VA	ACCURACY AT 60 HZ
608-501	500:5	6	1 %
608-601	600:5	8	1 %
608-801	800:5	12	1 %
608-102	1,000:5	13	1 %
608-122	1,200:5	16	1 %
608-152	1,500:5	25	1 %
608-162	1,600:5	27	1 %
608-202	2,000:5	33	1 %
608-252	2,500:5	42	1 %
608-302	3,000:5	50	1 %
608-322	3,200:5	54	1 %


## Models 606 & 608 Split Core

These transformers are designed for assembly to an existing electrical installation without the need for dismantling the primary bus or cables.

### Caution:

Proper safety precautions must be followed during installation by a trained electrician. Never install while bus is energized.

The current transformer must have its secondary terminals short circuited or the burden connected, before energizing the primary circuit.

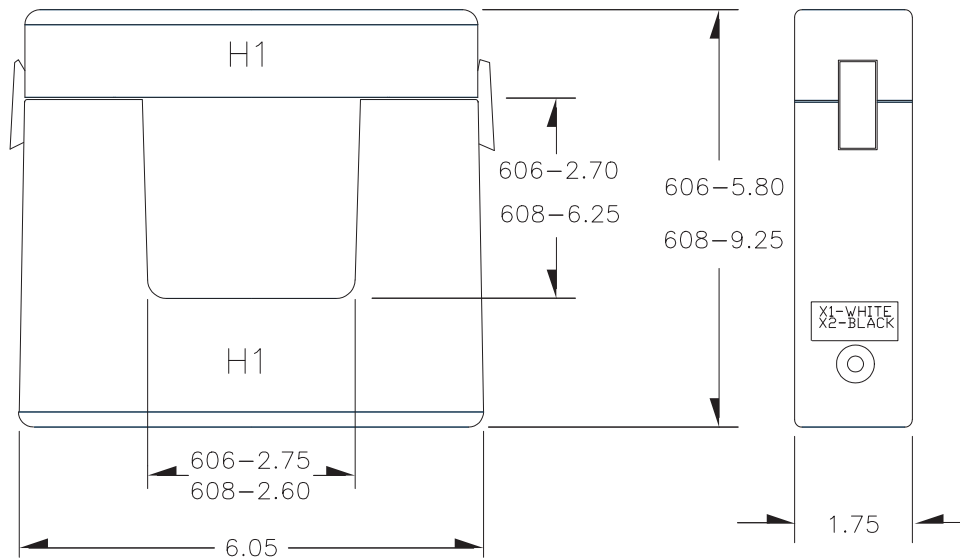

For more information, visit  
[governova.com/grid-solutions](http://governova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GEA-N50273  
English  
251023