GE Grid Solutions



FKG2M

Generator Circuit Breaker for Power Plants from 100 to 200 MW*

Power plant owners are concerned with the availability and reliability of their plants. That is why it is crucial to rely on equipment capable of safely interrupting fault conditions while protecting connected equipment and reduce outage periods.

Higher Reliability

FKG Generator circuit breakers are equipped with a fully spring-operated mechanism for high reliability, maximum energy stability and low maintenance requirements. This model is equipped with a natural cooling system, consisting of an external heat exchanger using natural convection phenomena for SF_6 cooling.

Keep an Eye on your Generator Circuit-Breaker

The FKG2M figures out optional add-on CBWatch monitoring system (automatic diagnosis) for maintenance on real status of the switchgear.


Higher Safety

A true electro-mechanical sequential interlocking system assures a reliable mechanical and electrical coordination for higher safety.

Components and Single Line Diagram

- 1 Circuit breaker
- 2 Disconnector
- 3 Earthing switch
- 4 Starting switch
- 5 Capacitors

- 6 ZnO Surge arresters
- 7 Current transformers
- 8 Voltage transformers
- 9 Manual short-circuiting bar

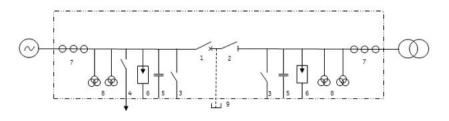

Technical Data

- 8.400 A 80 kA 50 Hz
- 8,200 A 80 kA 60 Hz

Key Benefits

- Utmost reliability of the full spring mechanism
- CBWatch makes proactive maintenance possible
- Interrupting chambers with natural cooling system
- Ideal for small & medium turbines or generators

Testing and Quality

- Product in full compliance with IEC/IEEE 62271-37-013 GCB standard
- Manufacturing ISO 9001 and ISO 14001 certified
- S.E.I. S.N.E. and national packing procedures



^{*} Depending upon the power station's specifications, GE may propose an alternative GCB power rating.


Technical Specifications

FKG2M

Rated maximum voltage	kV	17.5 / 24					
Short-circuit breaking current	kA	up to 80 / 63					
Rated out-of-phase breaking current	kA	40 / 31.5					
Rated breaking time	ms	50					
Rated closing time	ms	115					
Insulating gas		SF_6					
Rated absolute pressure at 20°C	kPa	850					
Minimum absolute pressure at 20°C	kPa	710					
Location		Indoor / Outdoor					
Breaker cooling type		Natural					
Ambient air temperature limits	°C	-25°C/+40°C					
Busbar temperature limit/Enclosure temperature limit	°C	90/70°C		105/80°C			
Frequency	Hz	50	60	50	60		
Maximum rated normal current (natural cooling) - Indoor with ambient air 40°C - Outdoor with ambient air 40°C	A A	8,400 8,150	8,200 7,950	7,900 7,650	7,700 7,400		
Phase spacing A with 100 mm step	mm		1,000 to 1,500				
Protection degrees (enclosure / cubicles)		IP65 / IP55					
SF ₆ monitoring by densimeter		3-phase					
Pressure reading	Yes						

		FKG2M	SKG2 Disconnector	MKG2 Earthing Switch	IKG2 Starting Switch
Rated peak withstand current	kA peak	220 / 173	220 / 173	220 / 173	173
Rated short time withstand current	kA	80 / 63	80 / 63	80 / 63	63
Rated duration of short-circuit	S	3 / 3	3 / 3	2/3	1
Rated insulation level (at sea level) - Phase to earth - Rated power frequency withstand voltage - Rated lightning impulse withstand voltage: wave 1,2/50 µs	kV kVpeak	60 125	60 125		30 60
Rated insulation level (at sea level) - Across terminals - Rated power frequency withstand voltage - Rated lightning impulse withstand voltage: wave 1,2/50 µs	kV kVpeak	60 125	70 145	60 125	60 125

Dimensions

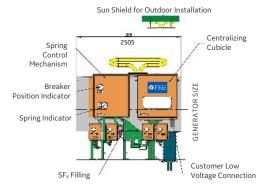

20-02-0

For more information please contact GE Grid Solutions

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact Phone: +44 (0) 1785 250 070

GEGridSolutions.com

IEC is a registered trademark of Commission Electrotechnique Internationale. IEEE is a registered trademark of the Institute of Electrical Electronics Engineers, Inc.

 $\ensuremath{\mathsf{GE}}$ and the $\ensuremath{\mathsf{GE}}$ monogram are trademarks of General Electric Company.

GE reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

FKG2M-Brochure-EN-2019-01-Grid-AIS-0140. © Copyright 2019, General Electric Company. All rights reserved.

