



GL 316 / GL 316X

Live Tank Circuit Breakers for 420 kV

Live tank circuit breakers for outdoor installations feature third-generation self-blast interrupter chambers and spring-operated mechanisms (FK). The field-proven interrupter chamber operates on the basis of the energy-optimised self-blast principle. The FK3 type mechanisms equip the entire range of circuit breakers with more than 250,000 references worldwide.

High Quality Components

- Single pole operating design
- Two self-blast interrupting chambers per pole
- Spring mechanism FK3 equipped with position indicator visible from outside
- Field-proven temperature-compensated density monitor with two-stage transducer and three-colour dial
- Easy access to the SF₆ filling connection (type DILO)
- Sealings suitable for temperatures down to -60 °C
- Hot-dip galvanized steel parts and mechanism housing completely of aluminum

Options for Customization

- Standard low voltage equipment provided, additional equipment is available
- Composite insulators available
- Seismic dampers for high seismic request can be provided
- Pressure relief system for passive protection of both substation and personnel
- RPH3 controller - point-on-wave tripping and closing relays
- CBWatch - compact and modular circuit breaker monitoring solution
- Closing resistors solution (GL 316D) to limit high and damaging overvoltages
- Grading capacitors depending on specifications

Enhanced Installation and Maintenance

- Preset at factory prior shipping - no adjustments during installation or commissioning
- Disassembly of interrupter chamber without removal of entire pole column possible

Rigorous Testing

GE's live tank circuit breakers meet the requirements of national and international standards. This has been confirmed by comprehensive type tests based on the latest versions of IEC standards.

High Performance

Live tank SF₆ circuit breakers use self-blast technology and benefit from latest technological developments as well as our field-proven, time-tested experience in high voltage switchgear in accordance with the IEC 62271-100 standard.

Superior Manufacturing

GE's entire development and production procedures for our live tank circuit breakers are fully compliant with the latest ISO 9001, ISO 14001 and OHSAS 18001 quality standards. This ensures the high quality of our products and services and is confirmed by regular audits.

Key Benefits


- High mechanical endurance and very low restrike probability according to IEC 62271-100 class M2 & C2
- Disconnecting option for easy and fast installation
- Closing resistor located in the same gas volume as breaking chamber



Dimensions

	A	B	C	D	E	F	G
GL 316 / GL 316X	5,300	6,612	931	1,026	N/A	4,899	6,099
GL 316D / GL 316XD	5,300	6,612	931	1,026	6,442	4,899	6,099

* Indicative values only. Final dimensions depend on configuration.

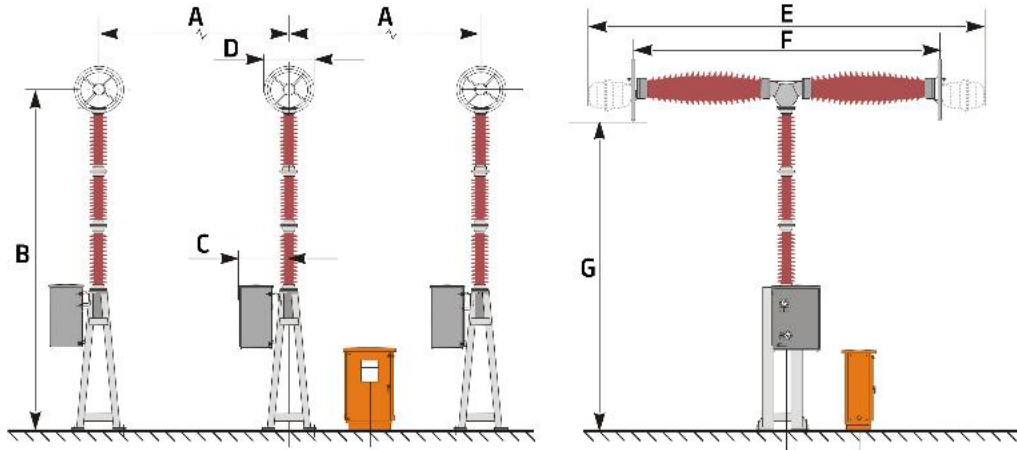

Ratings

Breaker type		GL 316 / GL 316D	GL 316X / GL 316XD
Number of breaks / phase		2	2
Rated normal voltage	kV	420	420
Rated normal current	A	4,000	5,500
Rated frequency	Hz	50/60	50
Rated dielectric withstand (up to 1,000 m)* (to earth / across open device)			
- At power frequency	kV	520/700	520/700
- At lightning impulse (1.2 / 50 μ s wave)	kV (peak)	1,425/1,425 (+240)	1,425/1,425 (+240)
- At switching impulse	kV (peak)	1,050/900 (+345)	1,050/900 (+345)
Rated short-circuit breaking capacity -Periodic component (r.m.s. value)	kA	50	63
First pole-to-clear factor		1.3	1.3
Peak short-circuit withstand current	kA (peak)	137	173
Rated line-charging capacitive switching		Class C2	Class C2
Mechanical endurance		Class M2	Class M2
Breaking time	cycles	2 - 2,3	2 - 2,3

* For other values, please contact GE Grid Solutions.

For more information please contact
GE Energy Connections
Grid Solutions

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact
Phone: +44 (0) 1785 250 070

GEGridSolutions.com

GE and the GE monogram are trademarks of General Electric Company.

GE reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

Grid-AIS-L3-GL_316_316X-0275-2017_03-EN. © Copyright 2017, General Electric Company.
All Rights Reserved.



Imagination at work