

GE

Energy Connections

Model 170

Current Transformer Window Diameter 4.25"

Application

Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Flexible leads are UL 1015, 1050 C CSA approved,

#16 AWG 24" long. Non-standard lead length can be specified.

Order mounting bracket kit 0221B00187 separately.

Model 170SHT also available as 170SHL with leads.

Approximate weight 3 lbs.



Model 170RL

Model 170SHT




Model 170

Catalog Number	Current Ratio	V.A. ± 1% Class	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)	Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30 °C	@ 55 °C
170**–201	200:5	5.0	0.6	1.2	—	—	—	0.040	2.0	2.0
170**–251	250:5	5.0	0.6	0.6	—	—	—	0.047	2.0	2.0
170**–301	300:5	12.5	0.6	0.6	1.2	—	—	0.053	2.0	2.0
170**–401	400:5	12.5	0.3	0.3	—	—	—	0.080	2.0	2.0
170**–501	500:5	20.0	0.3	0.3	0.6	—	—	0.110	2.0	1.5
170**–601	600:5	25.0	0.3	0.3	0.6	0.6	—	0.121	2.0	1.5
170**–751	750:5	30.0	0.3	0.3	0.3	0.6	—	0.151	2.0	1.5
170**–801	800:5	30.0	0.3	0.3	0.3	0.6	—	0.162	2.0	1.5
170**–102	1,000:5	50.0	0.3	0.3	0.3	0.6	0.6	0.265	1.33	1.0
170**–122	1,200:5	75.0	0.3	0.3	0.3	0.3	0.6	0.318	1.33	1.0
170**–152	1,500:5	50.0	0.3	0.3	0.3	0.3	0.6	0.344	1.33	1.0
170**–162	1,600:5	50.0	0.3	0.3	0.3	0.3	0.6	0.367	1.33	1.0
170**–202	2,000:5	100.0	0.3	0.3	0.3	0.3	0.3	0.459	1.0	0.8
170**–252	2,500:5	100.0	0.3	0.3	0.3	0.3	0.3	0.573	1.0	0.8
170**–302	3,000:5	50.0	0.3	0.3	0.3	0.3	—	0.424	1.0	0.8
170**–352	3,500:5	50.0	0.3	0.3	0.3	0.3	—	0.495	1.0	0.8
170**–402	4,000:5	75.0	0.3	0.3	0.3	0.3	—	0.646	0.8	0.6


**Note: When order, prefix Cat No. with model designation required i.e. 170SHT-201, 170RL-301, etc.




Model 170

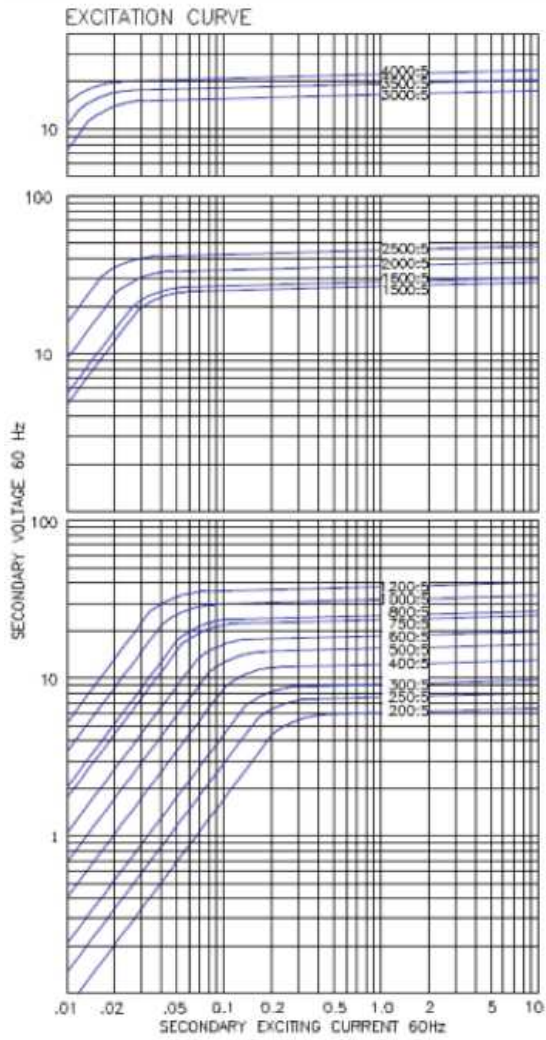

Model 170RL

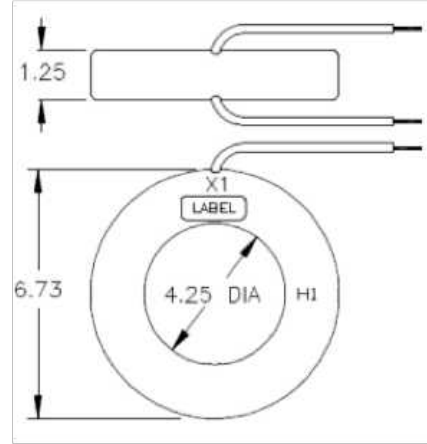

Model 170SHT

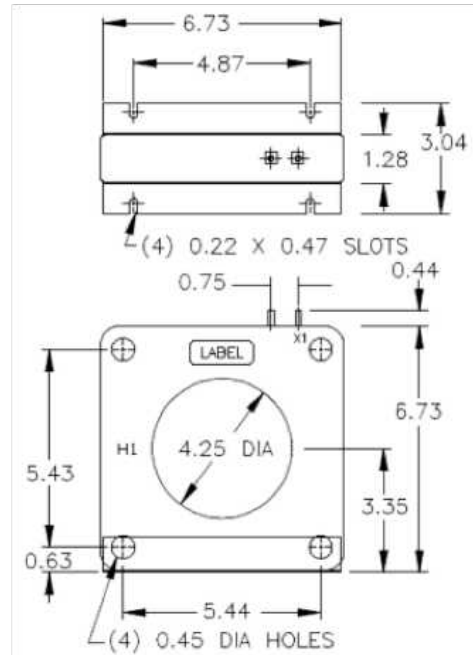

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_170-1264-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

