

Model 573

Current Transformer
Window Size 3.43" x 5.00"

Application

Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

1.33 at 30 °C. amb.,
1.0 at 55 °C. amb.

Terminals are brass studs No. 10-32
with one flatwasher, lockwasher and
regular nut.

Approximate weight 12 lbs.



REGULATORY AGENCY APPROVALS



E93779



LR89403



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Model 573

Catalog Number	Current Ratio	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)
		B0.1	B0.2	B0.5	B0.9	B1.8	
573-401	400:5	0.6	1.2	1.2	2.4	—	0.094
573-501	500:5	0.6	0.6	1.2	1.2	2.4	0.118
573-601	600:5	0.3	0.6	0.6	1.2	2.4	0.141
573-751	750:5	0.3	0.3	0.6	0.6	1.2	0.176
573-801	800:5	0.6	0.3	0.3	0.6	1.2	0.188
573-102	1,000:5	0.3	0.3	0.3	0.6	0.6	0.235
573-122	1,200:5	0.3	0.3	0.3	0.3	0.6	0.282
573-152	1,500:5	0.3	0.3	0.3	0.3	0.6	0.257
573-162	1,600:5	0.3	0.3	0.3	0.3	0.3	0.275
573-202	2,000:5	0.3	0.3	0.3	0.3	0.3	0.383
573-252	2,500:5	0.3	0.3	0.3	0.3	0.3	0.479
573-302	3,000:5	0.3	0.3	0.3	0.3	0.3	0.453
573-322	3,200:5	0.3	0.3	0.3	0.3	0.3	0.483
573-352	3,500:5	0.3	0.3	0.3	0.3	0.3	0.599
573-402	4,000:5	0.3	0.3	0.3	0.3	0.3	0.685



Model 573

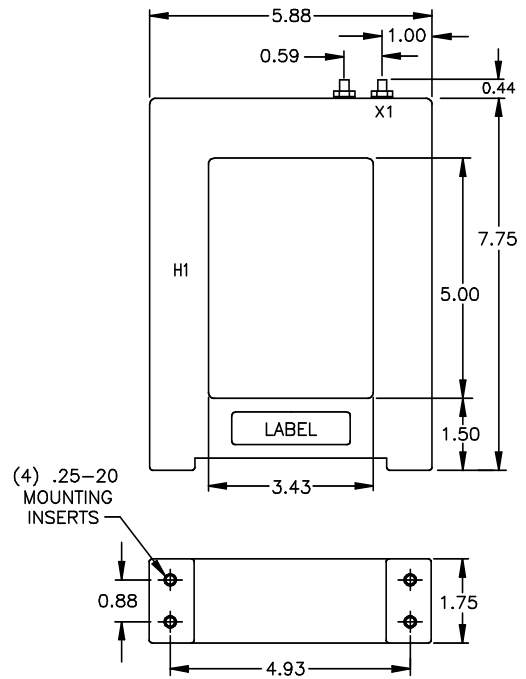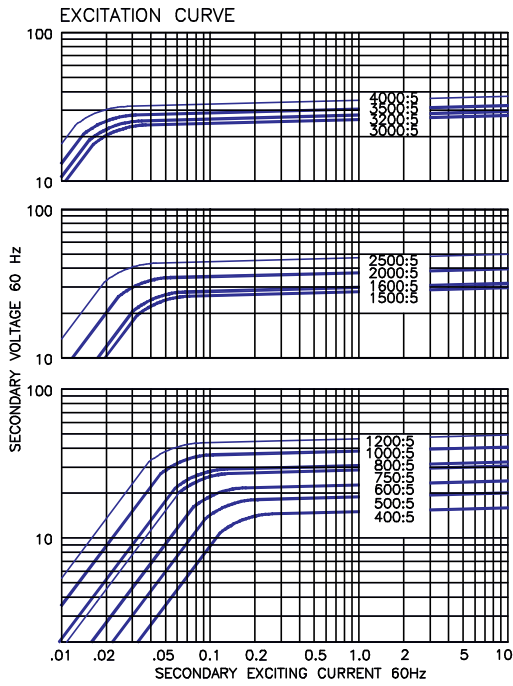

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_573-1332-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

