

GE

Energy Connections

Model 574

Current Transformer
Window Size 0.75" x 2.25"

Application

Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

1.33 at 30 °C. amb.,
 1.0 at 55 °C. amb.

Terminals are brass studs No. 10-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 2.5 lbs.





Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1

Model 574

Catalog Number	Current Ratio	ANSI Metering Class at 60 Hz		Secondary Winding Resistance (Ω @ 75 °C)
		BO.1	BO.2	
574-101	100:5	2.4	2.4	0.032
574-151	150:5	1.2	2.4	0.055
574-201	200:5	1.2	1.2	0.067
574-251	250:5	0.6	1.2	0.094
574-301	300:5	0.6	0.6	0.101
574-401	400:5	0.6	0.6	0.212
574-501	500:5	0.6	0.6	0.265
574-601	600:5	0.6	0.6	0.319
574-801	800:5	0.3	0.3	0.425



Model 574

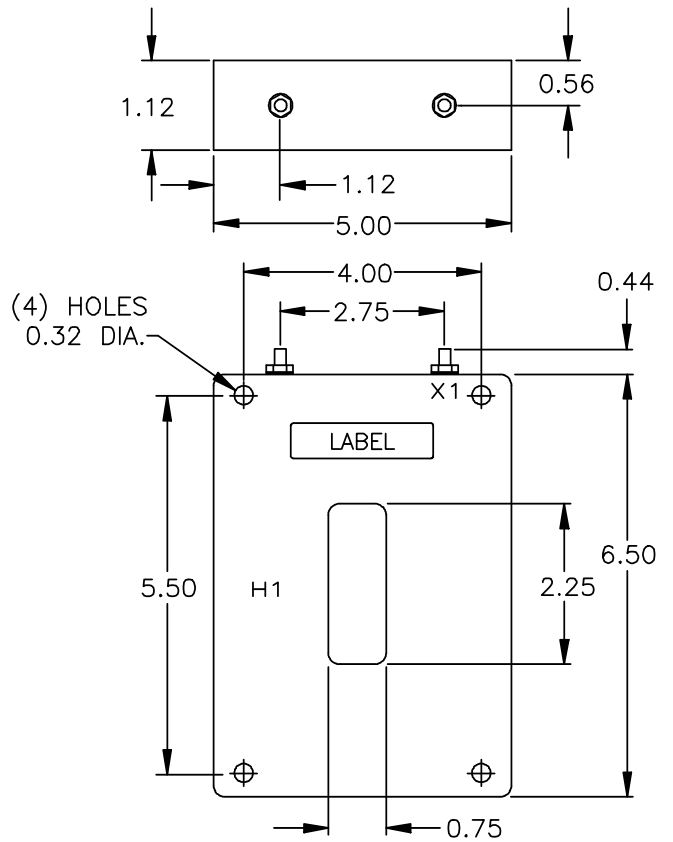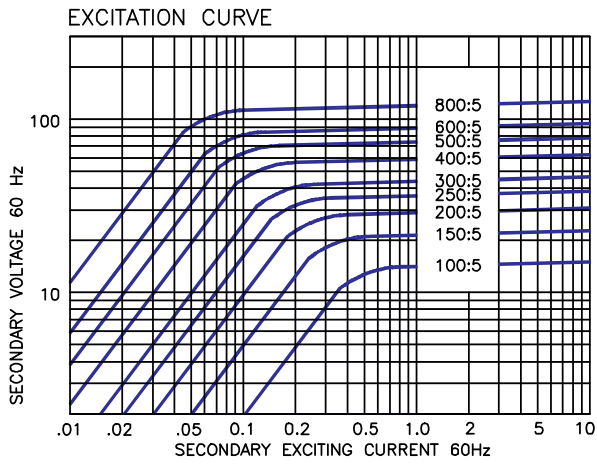

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_574-1333-2017_06-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

