

Model 575

Current Transformer
Window Size 0.75" x 3.25"

Application

Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

1.33 at 30 °C. amb.,
1.0 at 55 °C. amb.

Terminals are brass studs No. 10-32
with one flatwasher, lockwasher and
regular nut.

Approximate weight 2.5 lbs.

Excitation data available upon request.



REGULATORY AGENCY APPROVALS




Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Model 575

Catalog Number	Current Ratio	ANSI Metering Class at 60 Hz		Secondary Winding Resistance (OHMS @ 75 °C)
		BO.1	BO.2	
575-101	100:5	2.4	4.8	0.010
575-151	150:5	1.2	2.4	0.018
575-201	200:5	1.2	1.2	0.033
575-251	250:5	0.6	1.2	0.045
575-301	300:5	0.6	0.6	0.056
575-401	400:5	0.6	0.6	0.078
575-501	500:5	0.6	0.6	0.098
575-601	600:5	0.6	0.6	0.117
575-801	800:5	0.3	0.3	0.157
575-102	1,000:5	0.3	0.3	0.152



Model 575

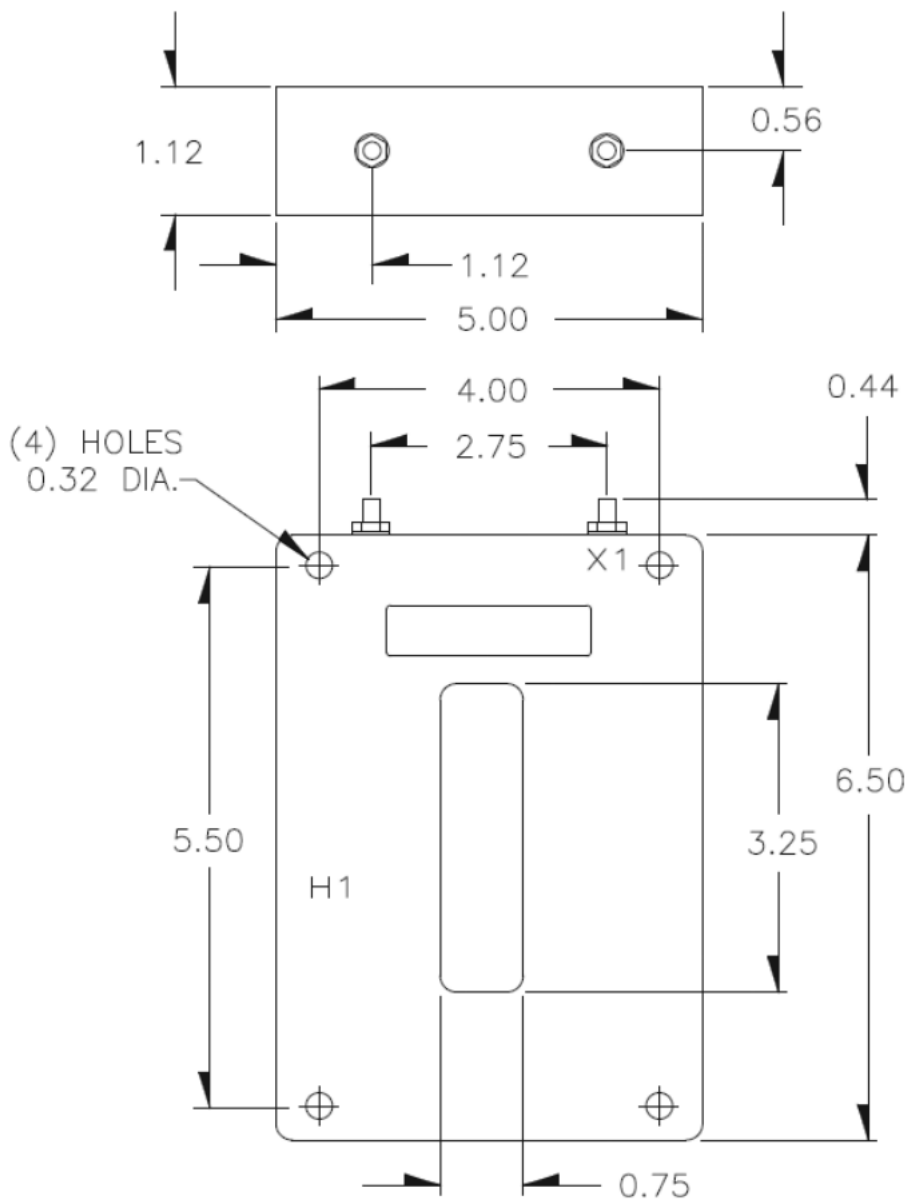

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_575-1334-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

