

Models 595 & 596

Zero Sequence Current Transformers
Window Sizes 4.56"x 13.44", 4.56"x 17.63"

Application

Zero-Sequence

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

2.0 at 30 °C. amb.,
2.0 at 55 °C. amb.

Terminals are brass screws No. 8-32 with lockwashers.

4 holes mounting system also available with brackets. Consult factory for details.

Approximate weight 24-29 lbs.






Cast Resin Construction

Models 595 & 596

Catalog Number	Current Ratio	Secondary Winding Resistance (Ω @ 75 °C)
595-102-1	1,000:1	7.52
596-102-1	1,000:1	7.52




Model 595 & 596 Cast Resin Construction

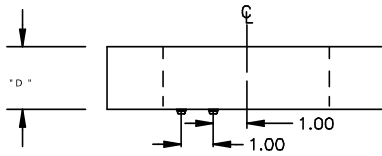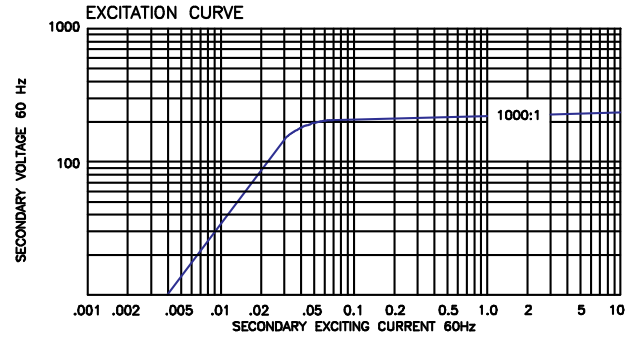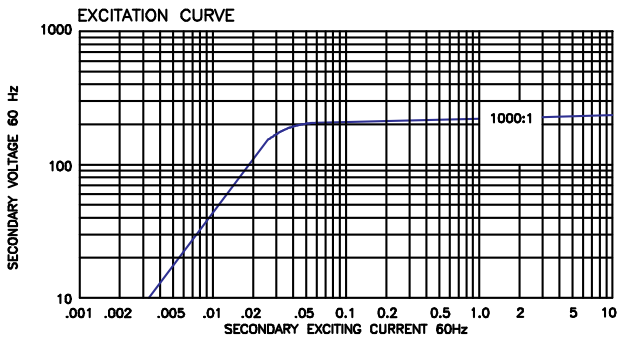

(4) HOLES \varnothing 0.55 DIA - MODEL 595

(4) HOLES \varnothing 0.41 DIA - MODEL 596

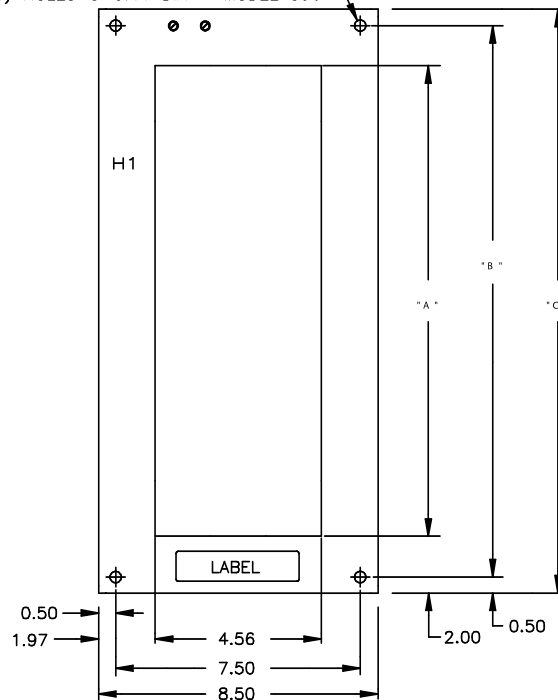

Models 595 & 596

Model	"A"	"B"	"C"	"D"
595	13.44	16.50	17.50	2.00
596	17.63	20.63	21.63	2.13

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_595_596-1129-2017_06-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

