

Model 5DARL

Current Transformer Window Diameter 1.56"

Application

Ammeters, wattmeters and cross current compensation.

Frequency


50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Flexible leads are UL 1015, 105 °C, CSA approved, #16 AWG, 24" long. Non-standard, lead length can be specified.

Approximate weight 2 lbs.

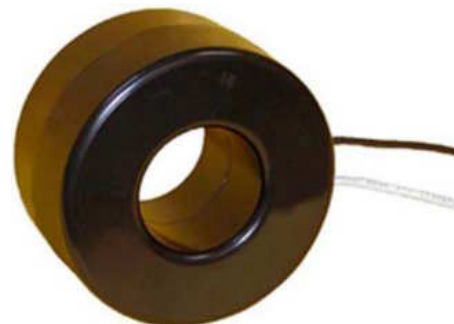

REGULATORY AGENCY APPROVALS
 E93779  LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1



Model 5DARL

Catalog Number	Current Ratio	V.A. ± 1% Class	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)	Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30 °C	@ 55 °C
5DARL-500	50:5	± 2% 2.5	2.4	—	—	—	—	0.010	2.0	2.0
5DARL-600	60:5	2.5	1.2	4.8	—	—	—	0.014	2.0	2.0
5DARL-750	75:5	3.5	1.2	2.4	—	—	—	0.018	2.0	2.0
5DARL-800	80:5	4.0	1.2	2.4	4.8	—	—	0.021	2.0	2.0
5DARL-101	100:5	5.0	0.6	1.2	4.8	4.8	—	0.029	2.0	2.0
5DARL-121	120:5	7.5	0.6	0.6	2.4	4.8	—	0.035	2.0	2.0
5DARL-1250	125:5	7.5	0.6	0.6	2.4	4.8	4.8	0.036	2.0	2.0
5DARL-151	150:5	10.0	0.6	0.6	1.2	4.8	4.8	0.042	2.0	2.0
5DARL-201	200:5	12.5	0.6	0.6	0.6	2.4	2.4	0.058	2.0	1.5
5DARL-251*	250:5	20.0	0.3	0.3	0.6	1.2	2.4	0.078	2.0	1.5
5DARL-301	300:5	25.0	0.3	0.3	0.6	1.2	1.2	0.084	1.5	1.33
5DARL-401	400:5	40.0	0.3	0.3	0.3	0.3	1.2	0.111	1.5	1.0
5DARL-501*	500:5	50.0	0.3	0.3	0.3	0.3	0.6	0.175	1.5	1.0
5DARL-601	600:5	60.0	0.3	0.3	0.3	0.3	0.6	0.152	1.0	0.8
5DARL-751	750:5	75.0	0.3	0.3	0.3	0.3	0.6	0.190	1.33	1.0
5DARL-801	800:5	80.0	0.3	0.3	0.3	0.3	0.3	0.202	1.33	1.0
5DARL-102*	1000:5	90.0	0.3	0.3	0.3	0.3	0.3	0.316	1.0	0.8

* Measurement Canada Approved AE-1180



Model 5DARL

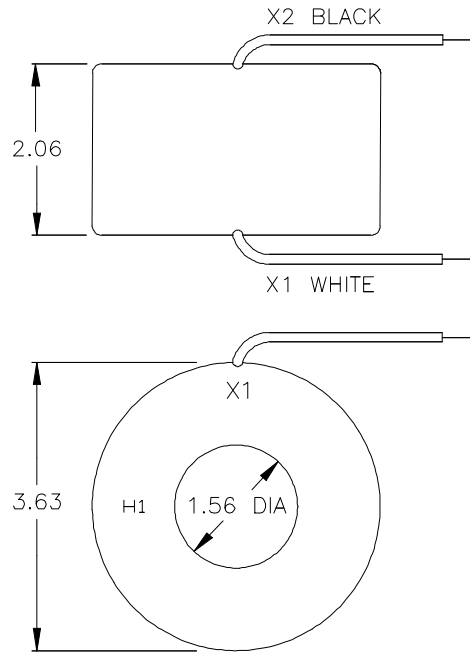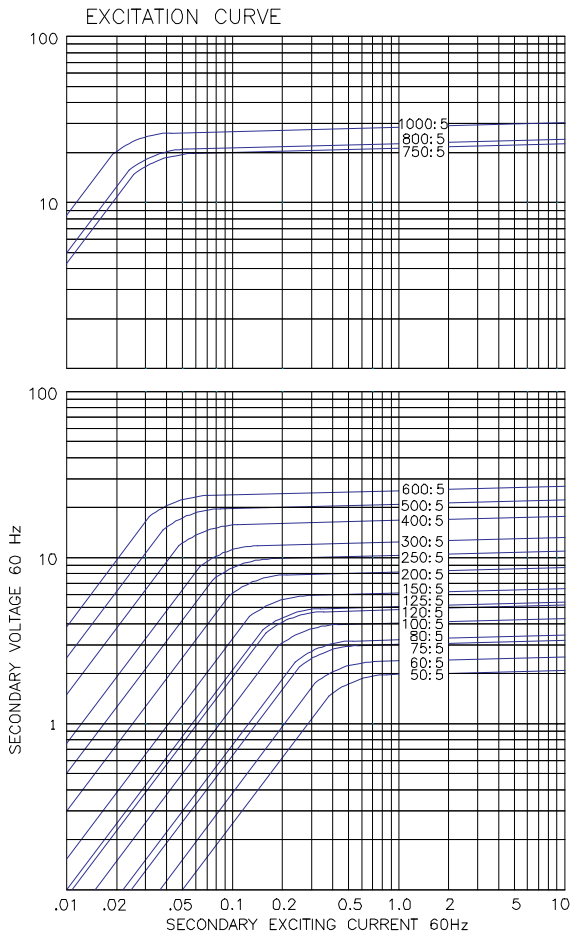

GEGridSolutions.com

ITI-Model-5DARL-Spec-EN-2019-10-Grid-PQP-1215. © Copyright 2019. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

