

MODEL HGF8

Ground Fault Current Transformer

Specially designed to match the ground fault input of GE Vernova Multilin motor protection relays and should be used to ensure correct performance. This CT can sense low leakage currents over the relay setting range with minimum error.

Notes

1. Ratio 50:0.025 Amp
2. Insulation Class: 0.6 kV, 10 kV BIL
3. Frequency: 50-60 Hz
4. DC resistance approximately 56 ohms
5. Thermoplastic case
6. Terminals are #8-32 brass studs with one flat washer, lockwasher, and regular nut





Part Number

140-SD-13526
50:0.025 Amps (2,000:1 Ratio)



7. Approximate weight: 22.0 lbs (10 kg)
8. UL and cUL recognized
9. Dimensions shown as inches [mm]
10. Accuracy $\pm 1.0\%$ at 1.0 VA
11. Order mounting bracket kit 0221B00259 separately
12. Application: Ground fault sensors to work in conjunction with GE Vernova Multilin motor management relays.



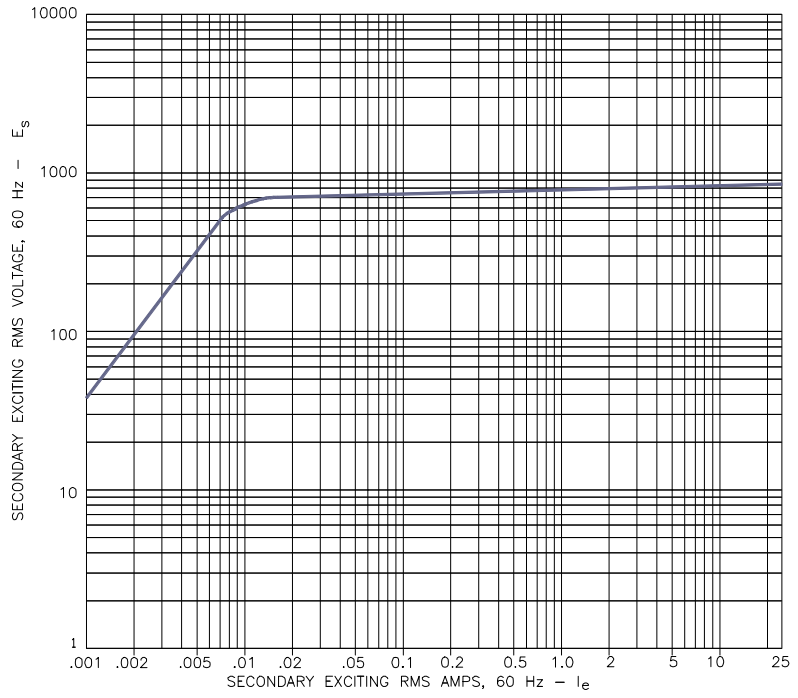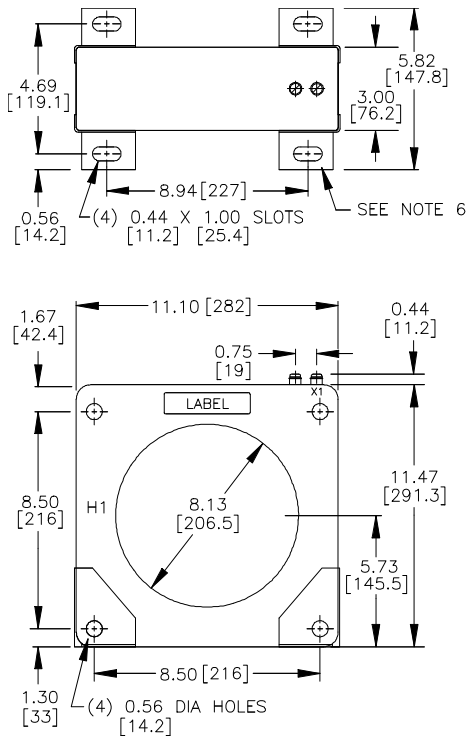

For more information, visit governova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GEA-N50392
English
251023