

Model 142MR

Current Transformer Multi-Ratio Window Diameter 7.25"

Application

Relaying.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.


Order mounting bracket kit 0221B00259 separately.

Approximate weight 31 lbs.




Model 142MR







Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30 °C	@ 55 °C
142-601MR	C50	2.0	2.0
142-122MR	C200	1.5	1.0
142-202MR	C200	2.0	1.5
142-302MR	C200	1.0	0.8
142-402MR	C200	1.0	0.8
142-502MR	C200	1.0	0.8

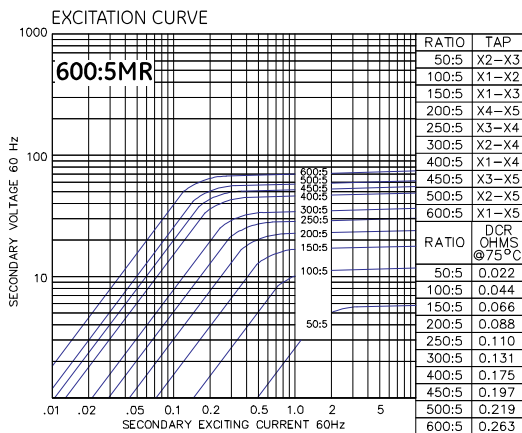

Model 140-601MR

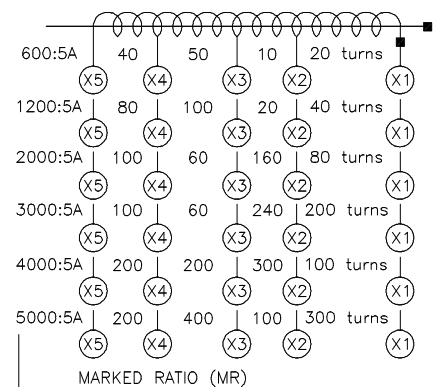

Model 142MR

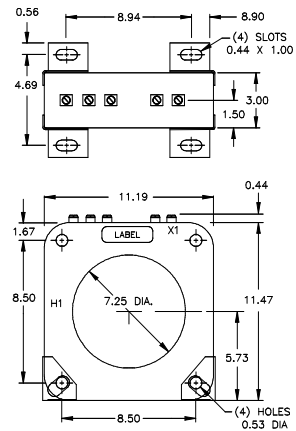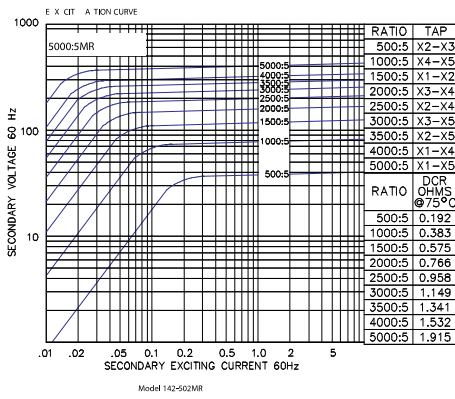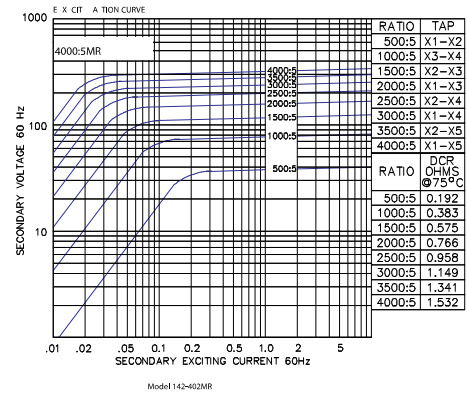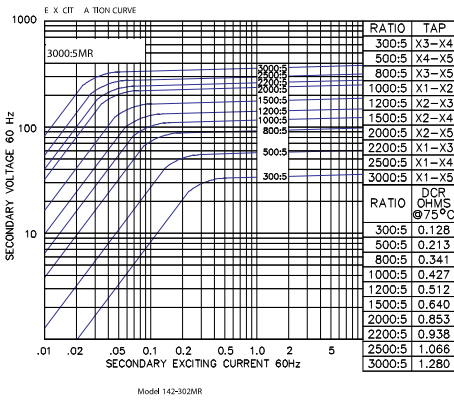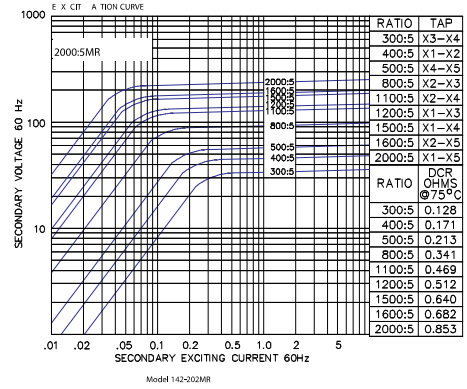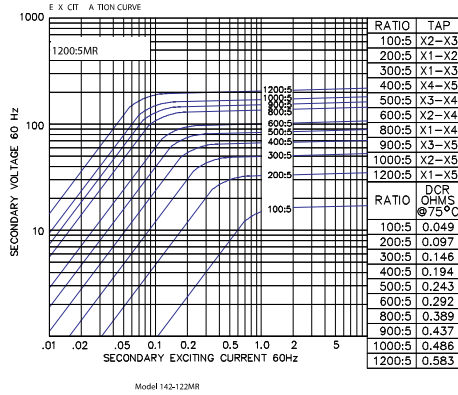

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_142MR-1255-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

