

# Model 144MR

**Current Transformer with Multi-Ratio Window Diameter 6.00"**

## Application

Relaying.

## Frequency

50-400 Hz.

## Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Order mounting bracket kit 0221B00259 separately.

Approximate weight 40 lbs.




## Model 143MR

Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30 °C	@ 55 °C
144-601MR	C100	2.0	1.5
144-122MR	C200	2.0	1.5
144-202MR	C200	1.5	1.0
144-302MR	C400	1.0	0.8
144-402MR	C400	1.0	0.8
144-502MR	C400	1.0	0.6


REGULATORY AGENCY APPROVALS

E93779 LR89403


Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1

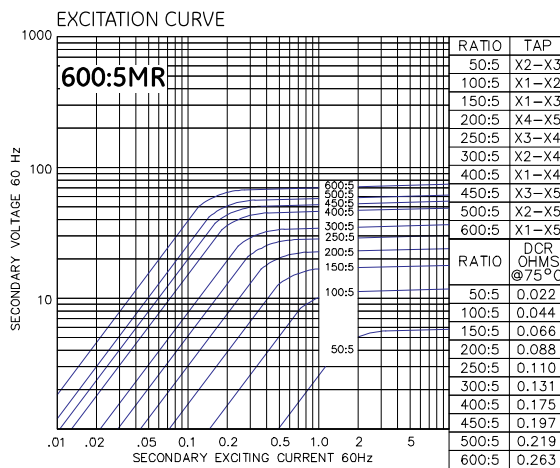


Model 140-601MR

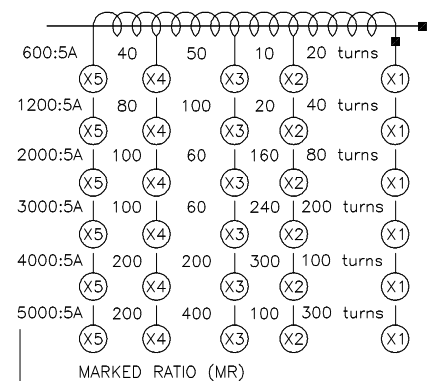


# Model 144MR

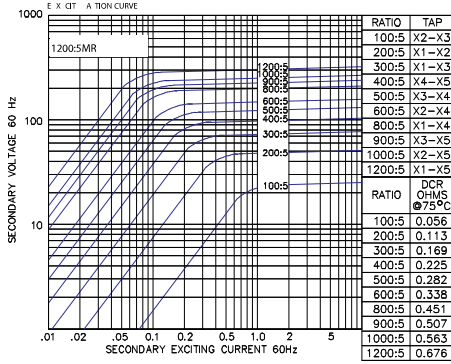


Model 144-122MR

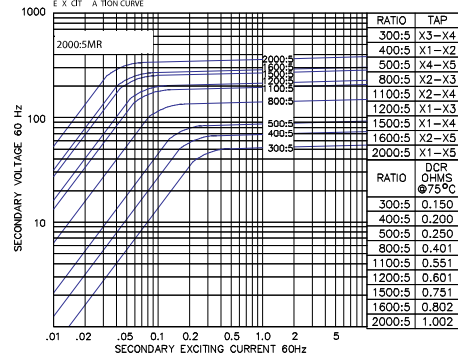


Model 144-202MR

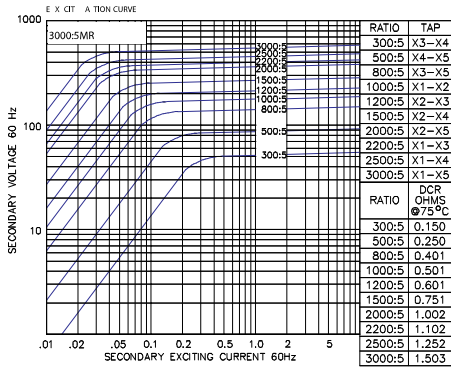


Model 144-302MR

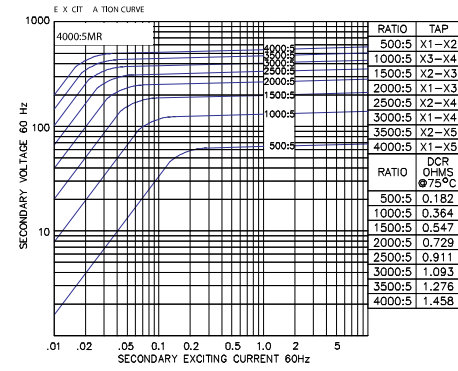

Model 144-402MR

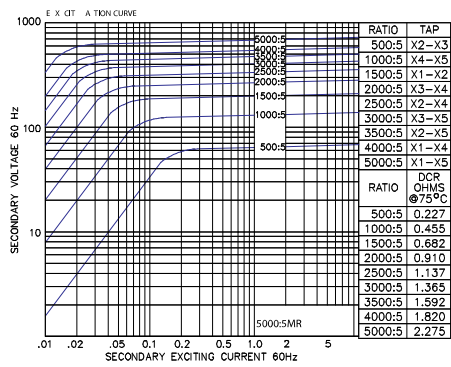

Model 144-502MR

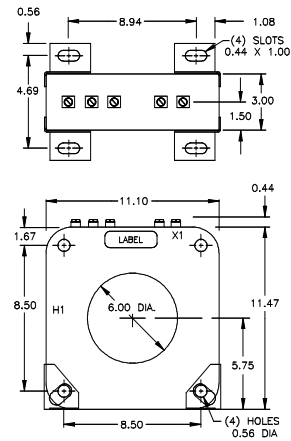

## GEGridSolutions.com

Grid-AIS-L4-ITL\_Model\_144MR-1259-2017\_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

### Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

