

# Model 203MR

## Current Transformer with Multi Ratio Window Diameter 5.25"

### Application

Relaying.

### Frequency

50-400 Hz.

### Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Approximate weight 28 lbs.




Multi-Ratio  
Models 200, 201, 202 and 204 also available as 600:5 Multi-Ratio.

### Model 203MR


Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30 °C	@ 55 °C
203-601MR	C100	2.0	2.0
203-122MR	C200	2.0	1.5
203-202MR	C200	1.0	0.8
203-302MR	C200	1.0	0.6
203-402MR	C100	1.0	0.6
203-502MR	C100	0.8	0.3




Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1

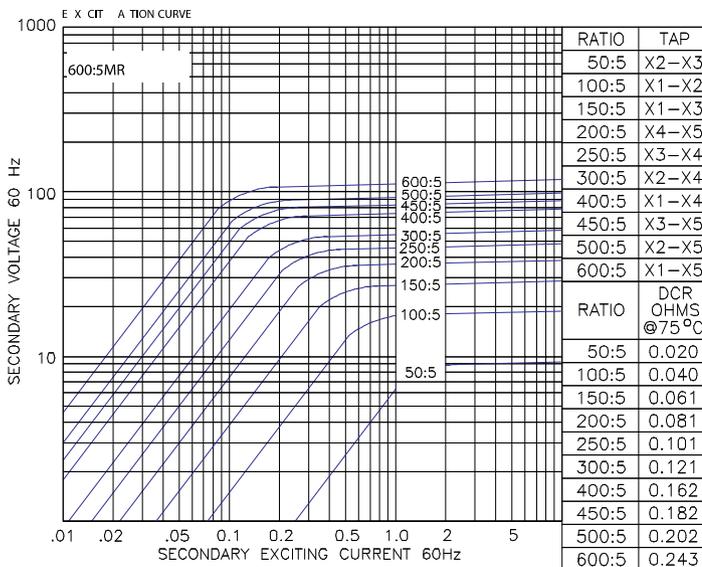


Model 203-601MR

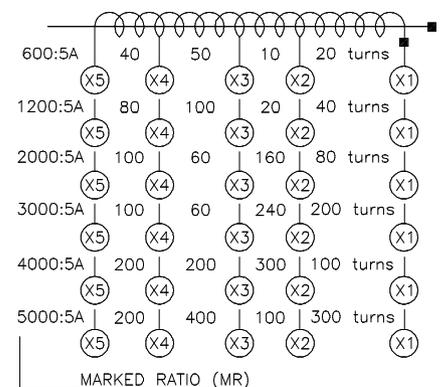


# Model 203MR

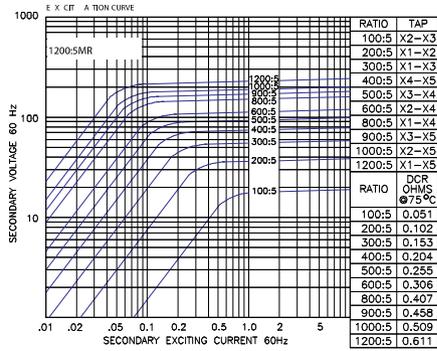


Model 203-122MR

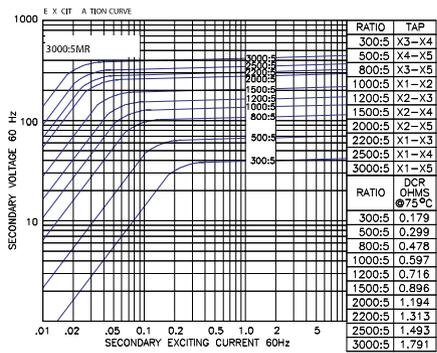


Model 203-302MR

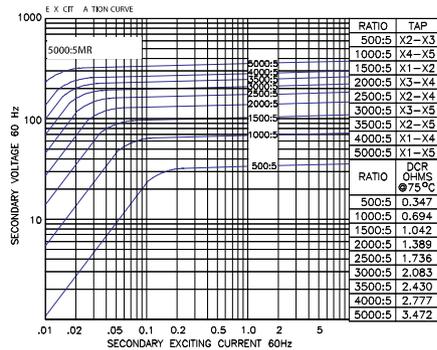


Model 203-502MR

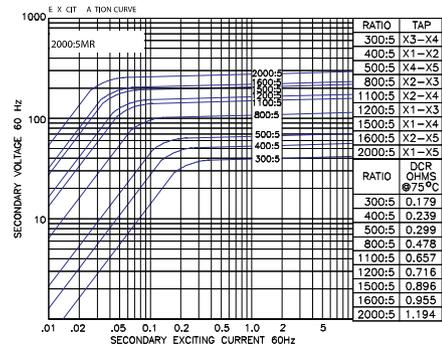

Model 203-202MR

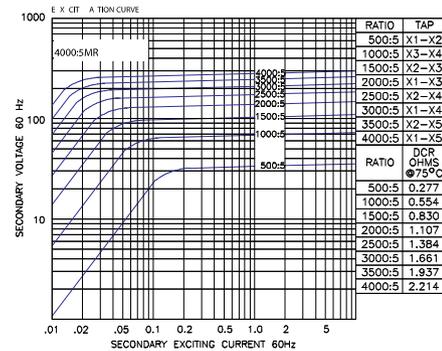

Model 203-402MR

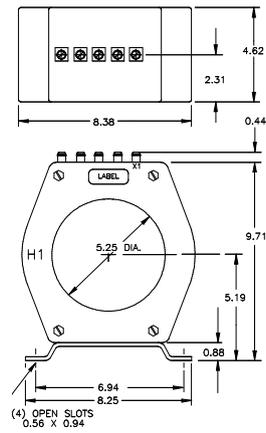

[GEGridSolutions.com](http://GEGridSolutions.com)

Grid-AIS-L4-ITL\_Model\_203MR-1277-2017\_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

## Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

